

Polywater[®] LZ

High Performance Lubricant



TECHNICAL SPECIFICATION

Description:

Polywater[®] Lubricant LZ is a high-performance, specification-grade, cable pulling lubricant. This newest Polywater[®] Lubricant was developed for compatibility with the broad variety of modern LSZH/LSHF compounds. Polywater[®] LZ is also compatible with other high-performance cable jackets. It provides excellent tension reduction and is recommended for all types of cable pulling.

Polywater[®] LZ is slow drying and leaves a thin, slippery film that retains its lubricity for months after use. Lubricant LZ does not sustain flame when used with fire-retardant cables and systems. Its dried residue is non-conductive and non-combustible.

Polywater[®] Lubricant LZ is a stringy gel. It can be applied by hand or using Polywater's LP Pumps. It is also available in the unique Front End Pack[™] pre-lubrication bags.

Friction Testing:

Lubricity: Polywater[®] LZ Lubricant shows superior friction reduction on a variety of jacket types. Typical friction coefficients at 200 lbs/ft (2.91 kN/m) normal pressure are shown. Test results are based on the method described in the white paper, "Coefficient of Friction Measurement on Polywater's Friction Table, 2007" (polywater.com/FTable.pdf). Values are averages based on cable jacket and conduit materials from multiple manufacturers.

Cable Jacket	Conduit Type				
	Steel	FRP	HDPE	PVC	EMT
LSZH	.15	.17	.07	.07	.21
CSPE	.21	.24	.12	.16	.24
CPE	.13	.17	.06	.10	.16
XLPE	.10	.12	.04	.05	.11
LLDPE	.10	.11	.04	.05	.13

Coefficient of friction data on additional or specific cable jackets or conduits can be obtained from American Polywater Corporation.



Product Benefits:

- Specification grade
- Compatible with cable jacket materials
- Extensively tested on LSZH compounds
- Excellent friction reduction
- High cling factor
- Non-combustible residue
- Clean and non-staining
- Temperature stable

End Use:

Suitable for all types of cable installations, including:


- Nuclear and other generation plants
- Mass transit systems
- Oil and petrochemical
- Other critical fire areas
- Multi-bend cable pulls

Cable Compatibility:

Tensile and Elongation:

LSZH, CSPE, LLDPE, XLPE, CPE, and PVC cable jacket materials aged in Polywater[®] Lubricant LZ per IEEE Standard 1210¹ meet the tensile and elongation retention requirements of that standard.

Modern LSZH jackets are numerous and vary significantly in formulation. Polywater[®] LZ shows broad compatibility with this jacket technology. As shown in the graph below, the common cable pulling lubricants available through local supply houses show significant and sometimes devastating effects on LSZH cable jackets.

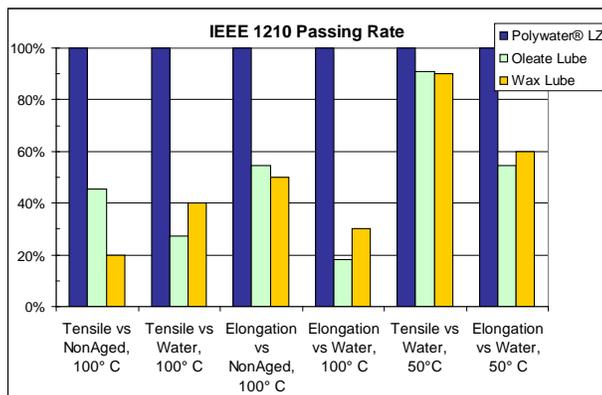

Polyethylene Stress Cracking:

Polywater[®] LZ shows no stress cracking on LDPE, MDPE, or HDPE cable jacket when tested per IEEE Standard 1210¹.

Volume Resistivity:

There are no significant changes in the conductive properties of XLPE and EPR semi-conducting compounds when volume resistivity is tested according to IEEE Standard 1210¹.

Building Wire Testing:

THHN and XLPE building wire meet UL tensile, elongation, and voltage withstand requirements after exposure to Polywater[®] LZ Lubricant as tested by UL requirements².

Cable Approvals:

Polywater[®] Lubricant LZ is approved by many cable manufacturers. Contact American Polywater for details.

¹ IEEE Std 1210-2004; IEEE Standard Tests for Determining Compatibility of Cable-Pulling Lubricants with Wire and Cable.

² UL Subject 267, Investigation for Wire-Pulling Compounds.

Performance Properties

Cling Factor:

Cling factor is a measure of the ability to apply the lubricant and have it stay on the jacket while the cable enters the conduit.

A six-inch length (152 mm) of a one-inch (25 mm) diameter cable will hold at least 35 grams of Polywater[®] Lubricant LZ for one minute when held vertically at 70° F (21° C).

Coatability:

Coatability is a measure of the lubricant's ability to coat the jacket as a thin film for continued lubricity on longer pulls.

Polywater[®] LZ will wet out evenly on cable jacket surfaces. It will not bead up or rub off of the jacket sample. A one-inch (25 mm) diameter XLPE cable dipped six inches (152 mm) into Polywater[®] Lubricant LZ, then withdrawn and held vertically, will retain at least 25 grams of Polywater[®] Lubricant LZ for one minute at 70° F (21° C).

Combustibility:

Combustibility is a measure of combustion properties of the lubricant residue in a fire situation (with an impinging heat flux).

Polywater[®] LZ has no flash point and its dried residue will not support combustion and spread flame. A 15-gram sample of the LZ Lubricant, when placed in a one-foot, split metal conduit and fully dried for 24 hours at 105°C, will not ignite and spread a flame more than three inches beyond the point of ignition when subjected to a continuous heat flux of 85 kW/m². The total test time was one-half hour.

Test method described in "Fire Parameters and Combustion Properties of Cable Pulling Compound Residues," presented to the International Wire & Cable Symposium, 1987.

Physical Properties:

Property	Result
Appearance:	White, stringy gel
% Non-Volatile Solids (weight):	4.0
VOC content:	0 gms/L 200 gms/L (wintergrade)
Viscosity (Brookfield):	35,000 – 50,000 cps @ 10 rpm
pH:	6.5 – 7.5

Application Properties:

Application Systems:

Polywater® LZ has a stringy gel consistency that makes it easy to lift, carry and hand apply.

Polywater® LZ can also be pumped directly into the conduit or onto the cable using the Polywater® LP-3 or LP-D5 specialty lubricant pumps. Pumps allow hands-free transfer and consistent application of lubricant. Polywater's low-shear pumps will not change the gel character of LZ lubricant. The LP-3 and LP-D5 pumps support lubricant application rates of 1 to 3 gallons (4 to 11 liters) per minute.

Polywater® LZ Front End Packs™ are bag packages that “pre-lubricate” the head end of the cable during the pull. The Front End Pack™ attaches to the winch line and pre-lubricates as it goes through the conduit. Two sizes are available to fit 2” and larger conduits.

Pull-Planner™ Tension Calculation Software is available from Polywater. Pulling tension estimations can ensure the use of appropriate pulling equipment and that the cable is installed within safe limits.

Polywater® LZ is also available in a special-order, pourable version (lower viscosity) called Polywater® PLZ. PLZ is primarily for underground work where pouring the lubricant into a cable feeder tube is a convenience.

Temperature Use Range:

Polywater® LZ:

20°F to 120°F (-5°C to 50°C).

Polywater® WLZ (wintergrade version):

-20°F to 120°F (-30°C to 50°C)

Temperature Stability:

Polywater® LZ will not phase-out or separate after five freeze/thaw cycles or 5-day exposure at 120°F (50°C).

Clean-Up:

Polywater® LZ is non-staining. Complete clean-up is possible with water.

Storage and Shelf Life:

Store Polywater® LZ in a tightly sealed container away from direct sunlight. Lubricant shelf life is one year.

Directions for Use:

Polywater® LZ Lubricant can be hand applied or pumped onto the cable as it enters the conduit.

For long pulls, place approximately two-thirds of the recommended quantity of lubricant into the conduit using the Front End Packs™ or by pumping.

For Front End Packs™ use, attach the packs of Polywater® LZ to the winch line or pulling rope in front of the cable by using tape or cable ties. Start the pull and slit open the entire length of the pack(s) with a sharp knife as it enters the conduit.

Supplement with direct jacket lubrication as the cable enters the conduit.

Clean-up by wiping off any excess lubricant with a rag.

Recommended Lubricant Quantity:

$$Q = k \times L \times D$$

Where:

Q = quantity in gallons (liters)

L = length of conduit run in feet (meters)

D = ID of the conduit in inches (mm)

k = 0.0015 (0.0008 if metric units)

The quantity that is appropriate for any given pull can vary from this recommendation by 50%, depending on the complexity of the pull. Consider the following factors:

Cable weight and stiffness
(Increase quantity for stiff, heavy cable)

Conduit condition
(Increase quantity for old, dirty or rough conduits)

Conduit fill
(Increase quantity for high percent conduit fill)

Number of bends
(Increase quantity for pulls with several bends)

Pulling environment
(Increase quantity for high temperatures)

Model Specification:

The statement below may be inserted into a specific job specification to help maintain engineering standards and ensure project integrity.

The cable pulling lubricant shall be Polywater® LZ Lubricant. The cable pulling lubricant shall provide excellent friction reduction with good cling and wetting through long pulls and multiple bends. The lubricant shall leave minimal, non-combustible residue. It shall be compatible with most cable jacket materials and be extensively tested on a broad variety of low smoke, halogen-free cable jacket materials.

Cable jacket compatibility shall be tested with the specific LSZH jacket material used on the cable. Test data shall be provided by the cable manufacturer or the lubricant manufacturer. It shall not stress crack polyethylene per ASTM Standard 1693. There shall be no significant changes in the conductive properties of XLPE and EPR semi-conducting compounds when the lubricant's effect on volume resistivity is tested according to IEEE Standard 1210.

A 15-gram sample of the lubricant, when placed in a one-foot, split metal conduit and fully dried for 24 hours at 105 degrees C, shall not spread a flame more than three inches beyond a point of ignition at a continued heat flux of 85 kW / meter². Total time of test shall be one-half hour.

Order Information:

<u>Cat #</u>	<u>Package Description</u>
	Regular
LZ-27	1-qt bag in a box (0.95 liter)
LZ-99	1-qt bag in a pail (0.95 liters)
LZ-55	½-gal bag in a box (1.9 liters)
LZ-110	½-gal bag in a pail (1.9 liters)
LZ-35	1-qt squeeze bottle (.95 Liter)
LZ-128	1-gallon pail (3.78 Liter)
LZ-640	5-gallon pail (18.9 Liter)
LZ-DRUM	55-gallon drum (208 Liter)

Wintergrade

WLZ-55	½-gal bag in a box (1.9 liters)
WLZ-110	½-gal bag in a pail (1.9 liters)
WLZ-35	1-qt squeeze bottle (.95 liter)
WLZ-128	1-gallon pail (3.78 liter)
WLZ-640	5-gallon pail (18.9 Liter)

Pourable

PLZ-128	1-gallon pail (3.78 Liter)
PLZ-640	5-gallon pail (18.9 Liter)

Copyright © 2015. American Polywater Corporation. All Rights Reserved

Important Notice: The statements and information here are made in good faith based on tests and observations we believe to be reliable. However, the completeness and accuracy of the information is not guaranteed. Before using, the end-user should conduct whatever evaluations are necessary to determine that the product is suitable for the intended use. The user assumes all risks and liability in connection with such use.

The statements contained herein are made in lieu of all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose, which warranties are hereby expressly disclaimed. American Polywater's only obligation shall be to replace such quantity of the product proven to be defective. Except for the replacement remedy, American Polywater shall not be liable for any loss, injury or damage, direct or indirect, arising from the use or the failure to properly use these products, regardless of the legal theory asserted.

Lit-LZTech/REV000

Makers of Polywater® and Dyna-Blue® Cable Lubricants
and Pull-Planner™ 3000 Software

**American
Polywater
Corporation**

11222 60th St. N
Stillwater, MN 55082
U.S.A
1-800-328-9384
1-651-430-2270
fax 1-651-430-3634

www.polywater.com (URL) support@polywater.com (e-mail)